



Camden

| | |
|----------------------------|------------------------------------------|
| Color | Camden |
| Size | 7 x 48 in |
| Overall Thickness | 5 mm (4 mm LPT Rigid Core / 1 mm dB pad) |
| Wearlayer Thickness | 20 mil |
| Textures | Deep Wood Embossed |
| Edge | Beveled |
| Finish | Matte with TuffCoat |
| Install | Click Edge Floating |

| Symbols | Test | Results |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Dimensional Tolerance Dimensional Stability Flexibility Deep Abrasion Static Load Castor Chair (100lbs) Heat Stability Light Stability Chemical Resistance Radiant Panel Smoke Density Lead Content Emissions Tests VOC Requirements Sound | Pass Pass 128mm 21,000 cycles 0.002 (Pass) 25,000 cycles 4.5 (Pass) 4.5 (Pass) Pass >0.45 watts/CM2 <450 <0.25 ppm 0g/L (Pass) 0g/L (Pass) xxx |

| Other Specification Options | |
|--------------------------------------------|----------------------|
| LPT Rigid Core Thickness (plus 1mm dB pad) | Wear Layer Thickness |
| 3.2mm | 8 mil |
| | 12 mil |
| 3.5mm | 8 mil |
| | 12 mil |
| 4mm | 8 mil |
| | 12 mil |
| | 20 mil |
| 4.5mm | 12 mil |
| | 20 mil |
| 5mm | 12 mil |
| | 20 mil |
| 5.5mm | 22 mil |

| Size Option | Acoustical Testing | Acoustical Results |
|-------------|-----------------------------------------------------|----------------------------------------|
| 7"x48" | 1mm 18" Open Web Truss (OWT) 6" Concrete Slab | IIC: 59 / STC: 54 IIC: 52 / STC: 52 |

*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Coronado

| | |
|----------------------------|------------------------------------------|
| Color | Coronado |
| Size | 7 x 48 in |
| Overall Thickness | 5 mm (4 mm LPT Rigid Core / 1 mm dB pad) |
| Wearlayer Thickness | 20 mil |
| Textures | Deep Wood Embossed |
| Edge | Beveled |
| Finish | Matte with TuffCoat |
| Install | Click Edge Floating |

| Symbols | Test | Results |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Dimensional Tolerance Dimensional Stability Flexibility Deep Abrasion Static Load Castor Chair (100lbs) Heat Stability Light Stability Chemical Resistance Radiant Panel Smoke Density Lead Content Emissions Tests VOC Requirements | Pass Pass 128mm 21,000 cycles 0.002 (Pass) 25,000 cycles 4.5 (Pass) 4.5 (Pass) Pass >0.45 watts/CM2 <450 <0.25 ppm 0g/L (Pass) 0g/L (Pass) |

| Other Specification Options | |
|--------------------------------------------|----------------------|
| LPT Rigid Core Thickness (plus 1mm dB pad) | Wear Layer Thickness |
| 3.2mm | 8 mil |
| | 12 mil |
| 3.5mm | 8 mil |
| | 12 mil |
| 4mm | 8 mil |
| | 12 mil |
| | 20 mil |
| 4.5mm | 12 mil |
| | 20 mil |
| 5mm | 12 mil |
| | 20 mil |
| 5.5mm | 22 mil |

| Size Option | Acoustical Testing | Acoustical Results |
|-------------|-----------------------------------------------------|----------------------------------------|
| 7"x48" | 1mm 18" Open Web Truss (OWT) 6" Concrete Slab | IIC: 59 / STC: 54 IIC: 52 / STC: 52 |


*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Nick Papa

| | |
|----------------------------|------------------------------------------|
| Color | Nick Papagiorgio |
| Size | 7 x 48 in |
| Overall Thickness | 5 mm (4 mm LPT Rigid Core / 1 mm dB pad) |
| Wearlayer Thickness | 20 mil |
| Textures | Deep Wood Embossed |
| Edge | Beveled |
| Finish | Matte with TuffCoat |
| Install | Click Edge Floating |

Symbols

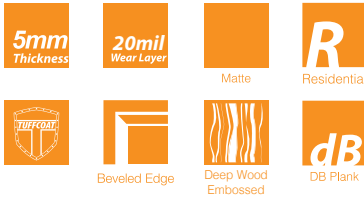

Test

Dimensional Tolerance
 Dimensional Stability
 Flexibility
 Deep Abrasion
 Static Load
 Castor Chair (100lbs)
 Heat Stability
 Light Stability
 Chemical Resistance
 Radiant Panel
 Smoke Density
 Lead Content
 Emissions Tests
 VOC Requirements

Results

Pass
 Pass
 128mm
 21,000 cycles
 0.002 (Pass)
 25,000 cycles
 4.5 (Pass)
 4.5 (Pass)
 Pass
 >0.45 watts/CM2
 <450
 <0.25 ppm
 0g/L (Pass)
 0g/L (Pass)

Other Specification Options

| LPT Rigid Core Thickness (plus 1mm dB pad) | Wear Layer Thickness |
|--------------------------------------------|----------------------|
| 3.2mm | 8 mil |
| | 12 mil |
| 3.5mm | 8 mil |
| | 12 mil |
| 4mm | 8 mil |
| | 12 mil |
| | 20 mil |
| 4.5mm | 12 mil |
| | 20 mil |
| 5mm | 12 mil |
| | 20 mil |
| 5.5mm | 22 mil |

Size Option

Acoustical Testing

Acoustical Results

| | | | |
|--------|------------|----------------------------------------------|----------------------------------------|
| 7"x48" | 1mm | 18" Open Web Truss (OWT) 6" Concrete Slab | IIC: 59 / STC: 54 IIC: 52 / STC: 52 |
|--------|------------|----------------------------------------------|----------------------------------------|

*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Vineyard

| | |
|----------------------------|------------------------------------------|
| Color | Vineyard |
| Size | 7 x 48 in |
| Overall Thickness | 5 mm (4 mm LPT Rigid Core / 1 mm dB pad) |
| Wearlayer Thickness | 20 mil |
| Textures | Deep Wood Embossed |
| Edge | Beveled |
| Finish | Matte with TuffCoat |
| Install | Click Edge Floating |

| Symbols | Test | Results |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Dimensional Tolerance Dimensional Stability Flexibility Deep Abrasion Static Load Castor Chair (100lbs) Heat Stability Light Stability Chemical Resistance Radiant Panel Smoke Density Lead Content Emissions Tests VOC Requirements | Pass Pass 128mm 21,000 cycles 0.002 (Pass) 25,000 cycles 4.5 (Pass) 4.5 (Pass) Pass >0.45 watts/CM2 <450 <0.25 ppm 0g/L (Pass) 0g/L (Pass) |

| Other Specification Options | |
|--------------------------------------------|----------------------|
| LPT Rigid Core Thickness (plus 1mm dB pad) | Wear Layer Thickness |
| 3.2mm | 8 mil |
| | 12 mil |
| 3.5mm | 8 mil |
| | 12 mil |
| 4mm | 8 mil |
| | 12 mil |
| | 20 mil |
| 4.5mm | 12 mil |
| | 20 mil |
| 5mm | 12 mil |
| | 20 mil |
| 5.5mm | 22 mil |

| Size Option | Acoustical Testing | Acoustical Results |
|-------------|-----------------------------------------------------|----------------------------------------|
| 7"x48" | 1mm 18" Open Web Truss (OWT) 6" Concrete Slab | IIC: 59 / STC: 54 IIC: 52 / STC: 52 |

*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.