

Cerulean

Porcelain Tile




1 Color | 2 Sizes | 1 Finish | 3/8" Thickness

12" x 24"
 6" x 6"

Featured: Cerulean

Details	Test	Method	Results	Packing	Pcs/Box	SF/Box	Lbs/Box
12" x 24" 6" x 6" Thickness: 3/8" Finish: Matte	Water Absorption	ISO 10545-03	< 0.5%	12" x 24" 6" x 6"	6pcs 22pcs	11.62 SF 5.38 SF	41.19 Lbs 21.92 Lbs
	Flexion Resistance	ISO 10545-04	=> 35 N/mm2				
	Abrasion Resistance	ISO10545-07	II				
	Thermal Shock Resistance	ISO 10545-09	Pass				
	Cracking Resistance	ISO 10545-11	Pass				
	Frost Resistance	ISO 10545-12	Pass				
	Acid Resistance	ISO 10545-13	GHB				
	Alcalis Resistance	ISO 10545-13	GLB				
	Resistance to Cleaning Products	ISO 10545-13	GB				
	Resistance to Chemical Products in swimming pool water	ISO 10545-13	GB				
	Stains Resistance	ISO 10545-14	Class 3				
	Slip Resistance (R)	16165-B	R11				

Color Option

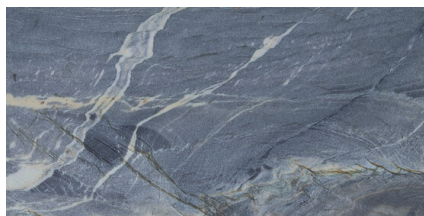

Cerulean

Symbols

